


CP06017 Pinbelegung:

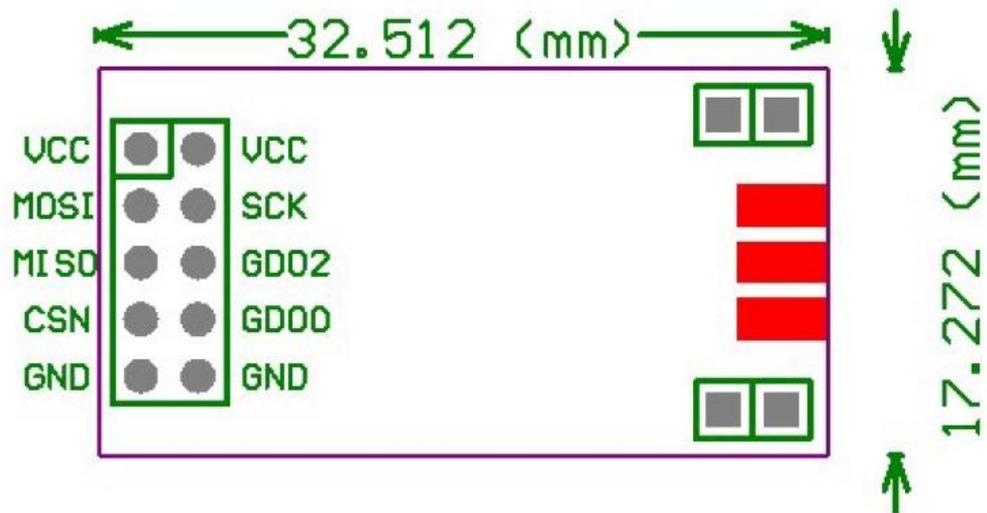

1、2	VCC	Power input	1.8V-3.6V
3	SI	Digit signal Input	SPI Digit Signal Input
4	SCLK	Digit signal Input	SPI CLK Input
5	SO (GD01)	Digit Output	SPI Digit Output
6	GD02	Digit Output	Work state
7	CSn	Digit Input	Serial configuration interface, chip select
8	GD00	Digit Output	Work state
9、10	GND	GND	