

# User Manual

## BW-SHP6

### AT A GLANCE



- 1. Socket Panel
- 2. Power Plug
- 3.ON/OFF Button
- 4.Flame Resistant material

### SPECIFICATIONS

Model Number: BW-SHP6  
 Type: EU plug  
 Input: 230V 50Hz  
 Max load: 15A  
 Maximum Power: 3450W

Working Temperature: -20 ~ 45°C  
 WiFi frequency: 2.4GHz  
 Material: V0 fireproof material

### INTRODUCTION

BW-SHP6 smart socket is controlled via WiFi or the physical control buttons. It can be operated by using the "BlitzWolf" smartphone app and can integrate with Amazon Echo, Google Home, IFTTT and other smart home controllers.  
 This manual details "BlitzWolf" app setup, and connecting to Amazon Echo. For instructions on connecting to Google Home, please contact us at [support@blitzwolf.com](mailto:support@blitzwolf.com).  
 For fast setup, please read and follow these instructions carefully.

### SETUP NOTES

Your smart socket, smart home controller and mobile phone must be able to connect to the same WiFi network.  
 The WiFi signal can influence on the connection process, make sure you are in an area where WiFi coverage is reliable.

Once connected to your WiFi network, you can control your smart plug through the app or another compatible controller.

### DECODING THE INDICATOR LIGHT

Status	Meaning
The indicator light is not flashing	The socket has not yet entered the connection process.
Fast flashing, twice a second.	The socket is ready to connect with Easy Mode.
Slowly flashing, once every two seconds.	The socket is ready to connect with AP Mode.
Flashing irregularly and making a ticking sound.	The socket is debugging.
Solid Red	The socket is connected and turned on.
No light	The socket is connected and turned off.

### CONTROL YOUR SOCKET WITH APP

#### Reset The Socket

Connect the socket to a power source and long press the ON/OFF button for 5 seconds to restore your smart socket to factory defaults.

#### Install the "BlitzWolf" App

1. Find the "BlitzWolf" App on Apple App Store, Google Play, or scan the QR code below and install it.



\*BlitzWolf\* is compatible with iOS 8.0 + and Android 4.4 +.

2. Register or log in to BlitzWolf App.

#### Home Set Up

If you are a new user of the app, when you log in, the app will first let you set up your family information and set it according to your needs.



## Connect Your Socket with App

### A. Easy Mode (Recommend)


1. Connect your smart socket to a power source. Open the "BizVoit" App, tap "Add DEVICES" or the "+" at the upper right corner of the page and select "AI" → "Electric Outlet";
2. Long press the socket's on/off button for 5 seconds, the indicator light will flash, and the App will automatically go to the "Add Device" page;
3. The indicator light will flash rapidly, and the socket will be detected by the App;
4. Choose the WiFi network and enter the WiFi password;
5. Wait for the smart socket to connect successfully;
6. Rename the socket. Eg.: Heater, Kitchen Fan or Table Lamp;
7. Tap "Done".



Power on the device and confirm that indicator light rapidly blinks

Indica... indicator rapidly blinks

Confirm indicator slowly blink



### B. AP Mode

1. Please change to "AP Mode". If connecting failed in "Easy Mode", the AP Mode is at the upper right corner of the "ADD DEVICE" page;
2. Long press on/off button until the indicator light flashes slowly;
3. Make sure the indicator light is flashing slowly and confirm it in App;
4. Choose the WiFi network and enter the WiFi password;
5. Tap "Connect Now", choose WiFi hotspot named "SmartLib-xxx";
6. Go back to the "BizVoit" Application;
7. Wait for the smart socket to connect successfully;
8. Rename the socket. Eg.: Heater, Kitchen Fan or Table Lamp;
9. Tap "Done".



Power on the device and confirm that indicator light slowly blinks

Indica... indicator slowly blink

Confirm indicator slowly blink



Company: Lotus N.L B.V.  
Address: Koningin Julianaplein 10, 1e  
Vlaag, 2816AA, The Hague, Netherlands.  
E-mail: info@bizvoit.com  
Tel: +31 (0)441 889999



MADE IN CHINA



### Switch

Turn on/off your device anywhere. As long as you have an internet connection you can control the devices in your home. For additional options, tap to the icon at the upper right of the page; you can modify the socket's name, share the socket with someone else. If you have several sockets, you can create a group, and turn multiple sockets on or off at the same time.

### Schedule

Schedule the socket to turn on or off at specific times.

### Energy Monitoring

See the socket's power consumption in real-time and over the last months.

### Add Scenes

Create advanced rules for controlling the socket based on variables such as weather, temperature or just a scene action.

### Home Management

Create a family home group to manage smart devices and give App access to family members. User access permission can be added and removed remotely by the administrator.

### AMAZON ECHO QUICK SETUP GUIDE



#### What You'll Need...

- Amazon Alexa App & Account
- BlitzWolf App & Account
- Echo Dot, Tap or other Amazon Voice Operated Devices
- Smart Socket

#### Set Your Echo



Before you bring to setup your smart socket, make sure your Echo Device is setup and connected to the internet.

### "BLITZWOLF" APP FUNCTIONS

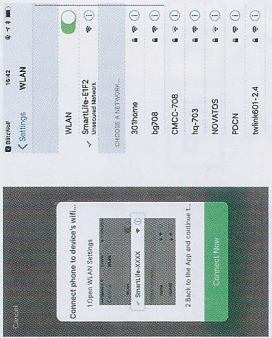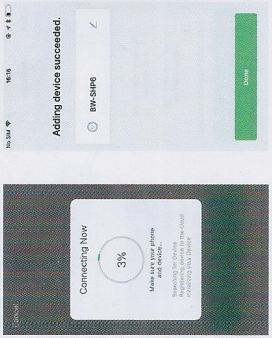

### Connect Your Socket to Alexa

1. Choose "Skills" in the options bar, and then search "BlitzWolf" in the search bar. Select "BlitzWolf" in the search results, and then click "Enable Skill".
2. Input your BlitzWolf username and password.
3. Enable permission to link your Alexa account to your BlitzWolf account.
4. Tap "discover devices" in the Alexa App and add the smart socket.



### Voice Control Smart Socket by Alexa

You can control the socket by using the socket name. E.g. Alexa, turn on Table Lamp; Alexa, turn off Table Lamp.

#### TROUBLESHOOTING

Problem	Possible Reason	Solution
Socket won't enter A3 mode or Easy mode	The socket failed to return to factory settings	Reset the socket by pressing and holding the power button for 5 seconds
Connection fails at the "Add Device" step	1. WiFi signal is weak The indicator light doesn't enter flash/ flash slowly mode	1. Check WiFi signal Long press the switch button and try again

Cannot connect Alexa to BlitzWolf

1. WiFi signal is weak  
2. VPN software issue  
Setup Error



Alexa can't discover device

Smart socket has a weak WiFi signal

1. Check WiFi signal  
2. Stop using VPN software  
3. Follow the instructions carefully

Check the socket is connected to the BlitzWolf App.

For further setup and connection support, please contact us at support@blitzwolf.com.



You have an 18 months manufacturer warranty so let us turn that frown up side down, tell us your story now.



Email us at [support@blitzwolf.com](mailto:support@blitzwolf.com)



Contact us online at [www.blitzwolf.com/contact-us.html](http://www.blitzwolf.com/contact-us.html)



Ordered via Amazon or other retailer? Please contact them directly for warranty claims.



Join the Blitzwolf community on Facebook, Twitter and at [www.blitzwolf.com](http://www.blitzwolf.com).



Tell us what you think and make a product review.

Blitzwolf simplifies your life and we love that you are happy. We invite you to:



scan to connect  
with us

BIITZWIF

BW-SHP6


BIITZWIF | BW-SHP6 Smart Socket



Company: Lotus N.L. B.V.  
Address: Koningin Julianaplein 10, 1e Verd,  
2595AA, The Hague, Netherlands.  
E-mail: peter@lctus.nl.com  
Tel: +31644168999



MADE IN CHINA

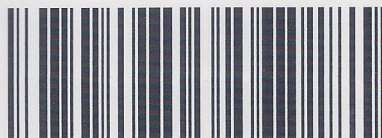

EU PLUG

POA5978529



  
[www.blitzwolf.com](http://www.blitzwolf.com)