

# PHONOPreAmp iVinyl

**Digitise records and tapes with 24bit/96KHz for MP3-Players**



## **The sound-rich duo for perfect audio recordings**

No matter if an old favourite song on LP or a tape, the PhonoPreAmp iVinyl can eternalize all your LP, single or cassette recordings with ease and speed via the USB interface. All with no sound card!

## **High-quality PhonoPreAmp for perfect recordings**

Record your old audio recordings to your PC without quality loss. The PhonoPreAmp is equipped with an input for your turntable (with moving magnet cartridge) and with a port for tape decks or other audio sources. Adjustable levels, shielded housing, not to mention carefully selected components and a first-class signal-to-noise ratio together guarantee the perfect recording. The PhonoPreAmp requires no drivers, no sound card and no power supply. Connect it to your computer's USB port and start recording.

## **Easy-to-use restoration software for Windows and Mac**

Do your records pop and crackle? Static noise on your tapes? TerraTec SoundRescue (Windows) and Roxio CD Spin Doctor (Mac) are powerful yet easy to use programs that will get rid of those annoying noises for you in no time at all. It operates in realtime, and with just a mouse click. Now there is nothing standing in the way of listening pleasure in CD quality.

sound



# PHONOPreAmp iVinyl

## Technical Details

### Features

- Ideal for moving magnet (MM) cartridges and high-output moving coil (MC) systems or audio devices with line level (e.g. tape decks)
- Not suited for standard MC systems
- USB power supplied
- Supported sample rates: 32kHz / 44.1 kHz / 48 kHz / 96 kHz
- Input sensitivity 6mV (min) / 1 kHz (max)
- Input capacity adjustable in three stages (100 pF, 250 pF and 430 pF)
- Filter function with high-precision RIAA equalization (20 Hz-20 kHz /  $\pm 0.3$  dB)
- Harmonic distortion < 0.007 % (5 mV)
- Signal-to-noise ratio > 86 dB (A)
- EMC-conforming shielded housing
- Signal and peak LED
- Bundled software for PC and Mac

### Software

- Algorithmix Sound Rescue (Windows)
- Roxio CD Spin Doctor (Mac)

### Important Note:


Internet connection for technical support required

### System Requirements

- 1 available USB 2.0 interface
- 10 MB of temporary free hard disk space for every 1 minute of audio to be recorded
- Moving Magnet (MM) or Moving Coil (MC) cartridge with high output level (min 2-3mV)
  
- 800 MHz Intel or AMD CPU or comparable Centrino certified Notebook
- Windows 2000, Windows XP, Windows Vista, Windows 7
  
- Macintosh computer with Intel or PowerPC processor (G4 or faster)
- Mac OS X v10.3.9 or later
- QuickTime 7 and higher

### Package Contents

- PhonoPreAmp iVinyl
- Cinch/Cinch cable
- USB connecting cable
- Registration card
- Service card
- Quick Setup Guide
- Software CD

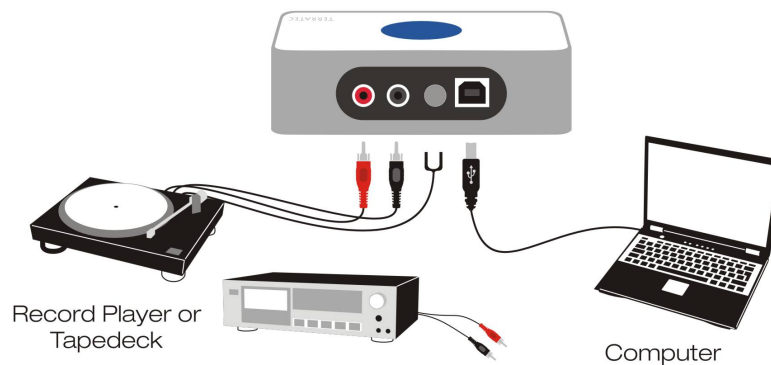

Art.No.: 10382  
EAN Code: 4017273103822  
Warranty: 24 Months

sound

